


Save Time and Money by Weighing Your Product as You Move It



Wireless display for piece counting, code entry and scale functions

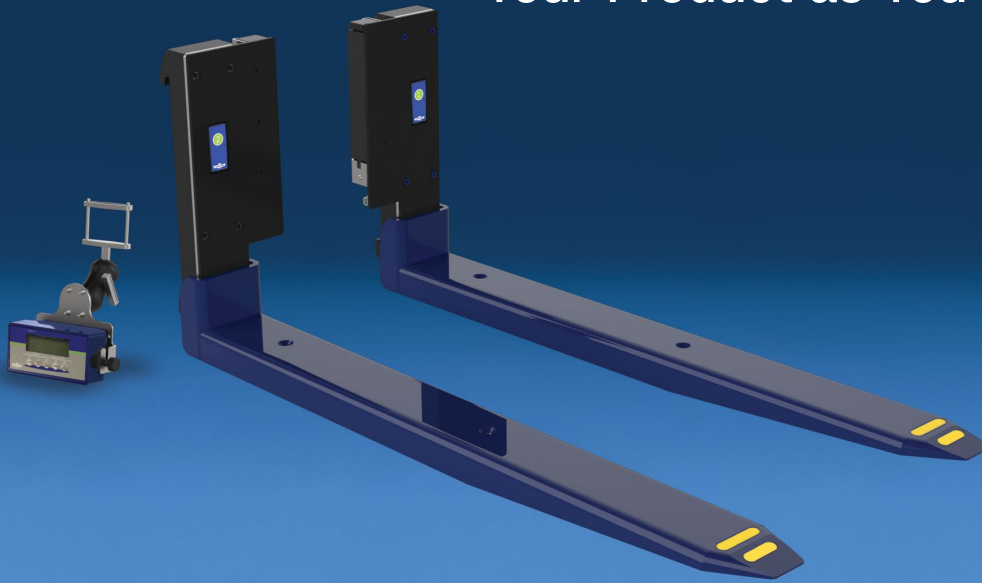

Display with easy-to-access rechargeable batteries



Each fork transmits information to the display via Bluetooth®



Rechargeable batteries come standard with all Weigh Forks Pro models



Optional printers make it easy to track activities and print receipts or labels

APPLICATIONS

Weigh Forks work on virtually any lift truck with a carriage. These unique and innovative forks let you weigh your product more efficiently by allowing you to weigh your product as you lift it. The wireless display uses Bluetooth® technology enabling you to view and track the weight of individual loads and total weight of multiple loads. Some models of Cascade Weigh Forks are approved by NTEP for use in the USA. Common uses for the Weigh Forks include incoming goods control, overload prevention, dosing, filling, waste management, order picking and inventory control.


OPTIONS

- Rotator or Pin-mount forks in legal-for-trade or standard
- Data transfer output devices, including:
 - RS232
 - Wireless Bluetooth®
 - WLAN (Wi-Fi)
- Optional mountings include pin/shaft or rotator.
- Thermal and dot matrix printers.
- Truck powered display available.

FEATURES

- Quick installation and set up.
- Digital calibration for fast and easy adjustments.
- Interchangeable rechargeable batteries for each fork.
- Bright backlit LCD driver display with rechargeable batteries.
- Manual and automatic zero correction.
- Gross/Net weighing.
- Displays both kg and lb units.
- Automatic push button tare.
- Automatic low voltage shut off.
- Manual tare entry totaling with sequence number.
- 5-digit ID code entry.
- Piece counting by sampling or manual piece weight entry.
- Error indicator.
- Internal clock.
- Compatible with load backrests.



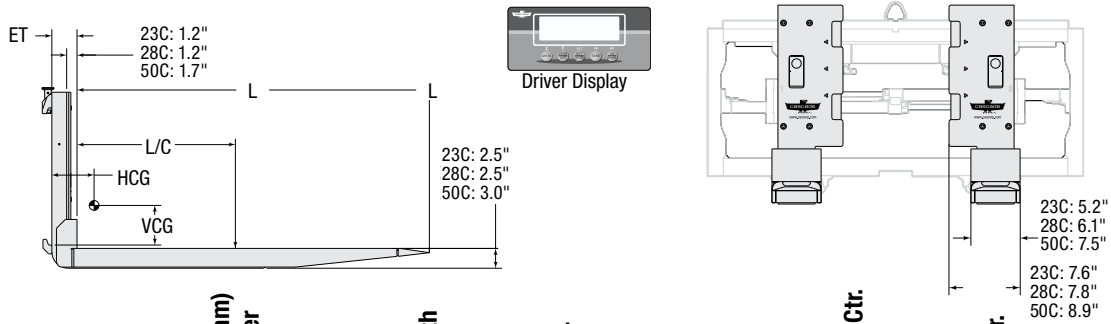

Catalog Order No.	Capacity@ 24" (600 mm) Load Center		Fork Length L	Weight per pair		Mounting Class	Horizontal Ctr. of Gravity HCG	Vertical Ctr. of Gravity VCG	Effective Thickness ET
	lbs	kg		lbs	kg				
Non-NTEP Approved: 0-5,000 lb with 2 lb display graduation									
23C-WFE-2A-0101	5,000	2,300	30.0"	274	124	II	9.2"	2.6"	3.0"
23C-WFE-2A-0105	5,000	2,300	32.0"	277	126	II	9.5"	2.6"	3.0"
23C-WFE-2A-0107	5,000	2,300	36.0"	283	128	II	10.1"	2.5"	3.0"
23C-WFE-2A-0115	5,000	2,300	42.0"	291	132	II	11.3"	2.4"	3.0"
23C-WFE-2A-0123	5,000	2,300	48.0"	306	139	II	12.6"	2.2"	3.0"
23C-WFE-2A-0131	5,000	2,300	54.0"	365	166	II	16.2"	1.8"	3.0"
23C-WFE-2A-0139	5,000	2,300	60.0"	377	171	II	17.5"	1.7"	3.0"
NTEP Approved: 0-5,000 lb with 5 lb display graduation									
23C-WFE-2A-0601	5,000	2,300	30.0"	274	124	II	9.2"	2.6"	3.0"
23C-WFE-2A-0605	5,000	2,300	32.0"	277	126	II	9.5"	2.6"	3.0"
23C-WFE-2A-0607	5,000	2,300	36.0"	283	128	II	10.1"	2.5"	3.0"
23C-WFE-2A-0615	5,000	2,300	42.0"	291	132	II	11.3"	2.4"	3.0"
23C-WFE-2A-0623	5,000	2,300	48.0"	306	139	II	12.6"	2.2"	3.0"
Non-NTEP Approved: 0-6,000 lb with 2 lb display graduation									
28C-WFE-3A-0107	6,000	2,750	36.0"	369	167	III	9.2"	4.2"	3.0"
28C-WFE-3A-0115	6,000	2,750	42.0"	381	173	III	10.3"	4.0"	3.0"
28C-WFE-3A-0123	6,000	2,750	48.0"	395	179	III	11.5"	3.8"	3.0"
28C-WFE-3A-0131	6,000	2,750	54.0"	462	209	III	15.2"	3.0"	3.0"
28C-WFE-3A-0139	6,000	2,750	60.0"	475	216	III	16.4"	2.9"	3.0"
Non-NTEP Approved: 0-1,000 lb with 2 lb display graduation/1,001-10,000 lb with 5 lb display graduation									
50C-WFE-3A-0115	10,000	4,500	42.0"	574	260	III	10.9"	4.1"	4.1"
50C-WFE-3A-0123	10,000	4,500	48.0"	591	268	III	12.0"	3.9"	4.1"
50C-WFE-3A-0131	10,000	4,500	54.0"	697	316	III	15.9"	3.1"	4.1"
50C-WFE-3A-0139	10,000	4,500	60.0"	715	324	III	17.0"	3.0"	4.1"
NTEP Approved: 0-10,000 lb with 5 lb display graduation									
50C-WFE-3A-0615	10,000	4,500	42.0"	574	260	III	10.9"	4.1"	4.1"
50C-WFE-3A-0623	10,000	4,500	48.0"	591	268	III	12.0"	3.9"	4.1"
50C-WFE-3A-0631	10,000	4,500	54.0"	697	316	III	15.9"	3.1"	4.1"

- ▶ NTEP – National Type Evaluation Program is a program administered by the National Conference on Weights and Measures (NCWM), which established a uniform set of criteria and test procedures for the evaluation of commercial weighing and measuring devices (used for legal for trade applications).
- ▶ System is capable of accuracy within .1% of actual load weight, however due to the display graduation limitations, the display may yield results outside the .1% range. Consult Cascade for details.
- ▶ DO NOT USE TO CLAMP LOADS.
- ▶ Load length can not exceed the length of the fork by more than 6".
- ▶ When ordering Weigh Forks for use on a Cascade Fork Positioner, consult Cascade.
- ▶ Weigh Forks ship with a rechargeable battery powered driver display, mounting bracket, two rechargeable fork battery packs and chargers for each unless additional components are specified.
- ▶ Truck powered display (12V-80V) is available, see options page for pricing and more information.
- ▶ The piece counting feature is not NTEP approved.
- ▶ Ingress protection IP65. Do not pressure wash.
- ▶ Optimal temperature range is 15°F - 105°F.
- ▶ Not recommended for use with Fork Extensions.

Cascade Corporation • PO Box 20187 • Portland, OR 97294-0187 • USA • 800 CASCADE (227.2233) • Tel 503.669.6257 • Fax 800.693.3768 • Fax 503.669.6367
 Cascade Canada Ltd. • 5570 Timberlea Blvd. • Mississauga, Ontario L4W 4M6 • Canada • 800.380.2272 • Tel 905.629.7777 • Fax 905.629.7785