

⚡ **S** SERIES[®] ⚡

SPECIFICATIONS



SE20T



15/17/20/25

Max Load Capacity
3000 / 3500 / 4000 / 5000 lbs
(1360 / 1588 / 1814 / 2268 kg)



Upright Table SE15-25T

Maximum Fork Height		Overall Height Lowered		Free Lift ¹		Standard Tilt Spec ² B°/F°
in	mm	in	mm	in	mm	
SE15/17/20/25T Standard						
100	2540	72.2	1834	4.3	109	5/6
110	2794	77.1	1958	4.3	109	5/6
• 121	3073	82.8	2103	4.3	109	5/6
129	3277	86.8	2205	4.3	109	5/6
143	3632	93.9	2385	4.3	109	5/6
160	4064	104.5	2655	4.3	109	5/6
172	4369	112.4	2855	4.3	109	3/6
183	4369	120.1	3051	4.3	109	3/6

SE15/17/20/25T Hi-Lo						
115	2921	77.1	1958	53	1346	5/6
• 126	3200	82.8	2103	59	1499	5/6
138	3505	88.7	2253	65	1651	5/6
145	3683	92.3	2344	68	1727	5/6
150	3810	95.1	2416	71	1803	5/6

Grade Clearance

Model	A%
SE15T	34
SE17T	34
SE20T	31
SE25T	34

SE15/17/20/25T Triple Stage


152	3861	72.2	1834	48	1219	5/6
171	4343	77.1	1958	53	1346	5/6
• 188	4775	82.8	2103	59	1499	5/6
204	5182	88.7	2253	65	1651	5/6
219	5563	95.1	2416	71	1803	5/6
226	5740	97.6	2479	74	1880	5/6
237	6020	102.5	2604	78	1981	5/6
254	6452	110	2794	86	2184	3/6

SE15/17/20/25T Quad³


222.5	5652	78.5	1994	53	1346	3/6
• 240.5	6109	83	2108	57	1448	3/6
258.5	6566	89	2261	63	1600	3/6
276.5	7023	95	2413	71	1803	3/6

- Indicates preferred standard sizes. For overall height raised with load backrest, add 48 in. (1220 mm) to maximum fork height. Other uprights available, contact a CLARK representative.
- 1 All freelif dimensions shown without standard 48 in. (1220 mm) high load backrest.
- 2 Standard tilt shown. Contact CLARK representative for information on optional tilt.
- 3 Length to face of fork, RAS and turning radius increase 4 in. with quad installation. Wide drive (45.2" OAW) required with quad uprights taller than 222.5".

Short Battery Compartments

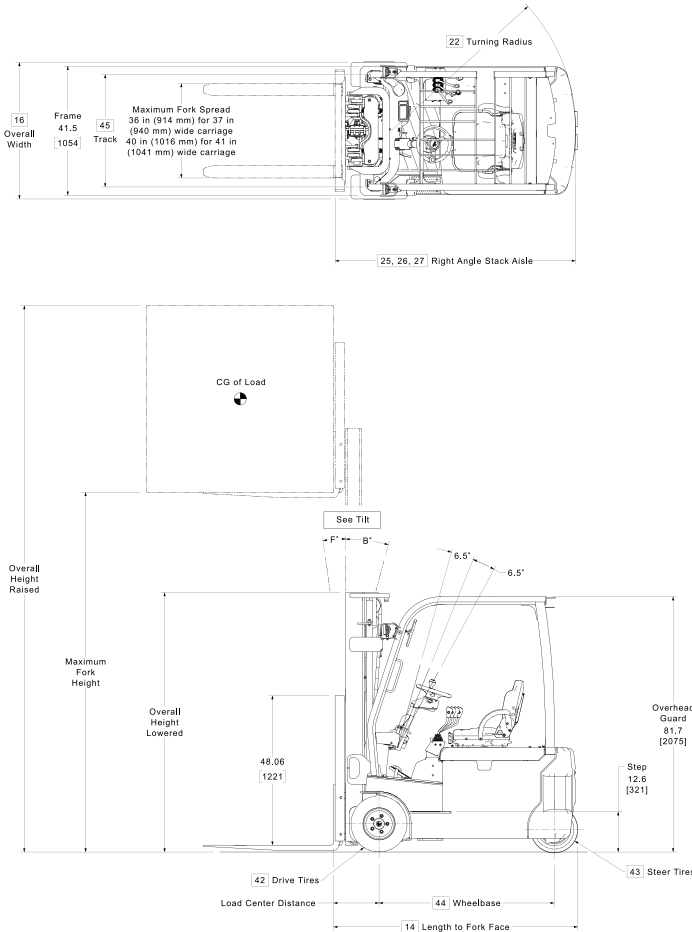

Tall Battery Compartments

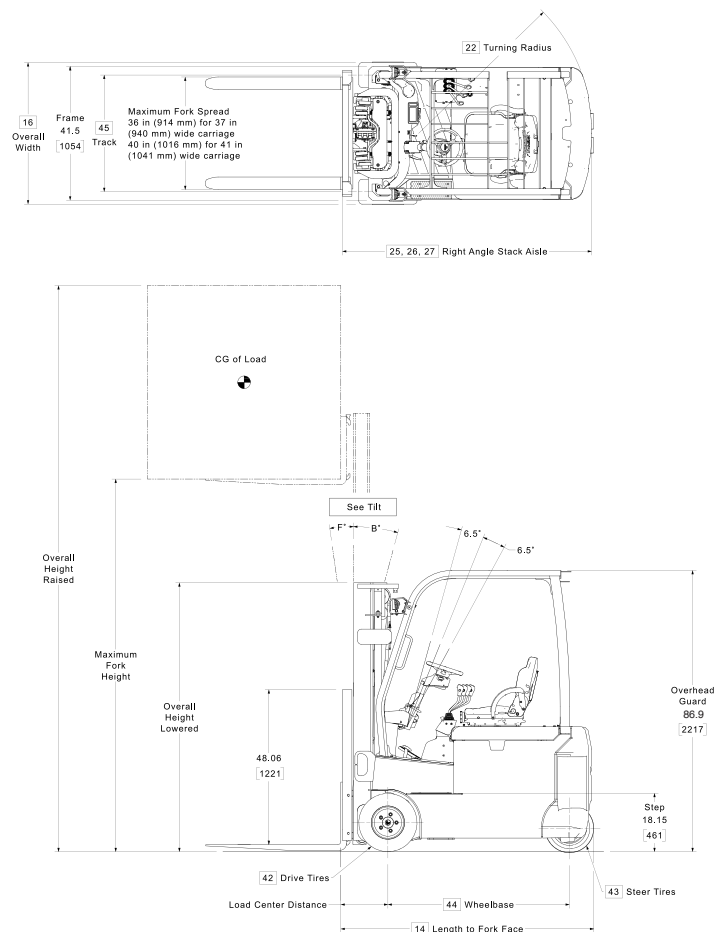

The specifications that vary from short or tall battery compartments are highlighted in green on the opposite page.

ANSI/ITSDF and Insurance Classification

Standard truck meets all applicable mandatory requirements of Part III-ANSI/ITSDF B56.1 Safety Standard for Powered Industrial Trucks and Underwriters Laboratories requirements as to fire hazard only for D and LP classifications. For further information contact a CLARK representative. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation and maintenance of powered industrial trucks including: ANSI/ITSDF B56.1; NFPA 505, fire safety standard for powered industrial trucks - type designations, areas of use, maintenance and operation; Occupational Safety and Health Administration (OSHA) regulations that may apply. Contact your authorized CLARK forklift truck dealer for further information including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements. Specifications, equipment, technical data, photos and illustrations are based on information at time of printing and are subject to change without notice. Some products may be shown with optional equipment.



CLARK: The Innovative and Durable Solution

The design, development, and manufacturing capabilities of CLARK, in combination with an unparalleled focus on customer support, a drive to understand fully each customer's needs in order to then supply the right solution, reflect the key essence of what is CLARK.

With over one million CLARK lift trucks sold around the world, each is a testament to the CLARK time-tested process of designing durable trucks with precise features that meet, if not exceed, the material handling needs of our customers. Our full range of dependable products – from pallet jacks to electric narrow aisle order selectors and up to our big 18,000lb capacity lift trucks – assures end-users CLARK has the solutions for their day-to-day needs.



These solutions built from industry innovations, from the nested I-Beam to a self-activating parking brake to new on-board diagnostics, began the same way: with the needs of our customers foremost in mind. By focusing on how we can improve our customers' material handling processes, we can assure our customers a lift truck designed to be the right solution for their needs.

When you bring it all together – an extensive research and development process, state-of-the-art manufacturing capabilities, and a superior dealership network – you have a company dedicated to delivering leading edge products for both today and far into the future. More reasons why CLARK is Built to Last®.

"CLARK, TOTALIFT, Powrworker, PartsPRO Plus, and Built to Last are registered in the U.S Patent and Trademark office. The "Hot Yellow Green" also known as "CLARK Green" is a trademark registered in the U.S Patent and Trademark office."



59-894-2071

CLARK MATERIAL HANDLING COMPANY
North American Headquarters
700 Enterprise Drive • Lexington, KY 40510
866-252-5275 • www.clarkmhc.com

SE20T
59-894-2071 Printed in USA OTP0820500
© 2021 CLARK Material Handling Company