



N/A AUGUST 18, 2023




Stylish and extremely powerful.


The MT-440 is the latest generation of heavy-duty tow tractors. Behind its stylish, compact design is a highly efficient AC direct-drive powertrain, plenty of power to haul 20,000-lb. loads over long distances, and an oversized industrial battery to lengthen running time. Features like tight turning radius, rear battery positioning and shock-dampening suspension deliver exceptional maneuverability, stability and comfort. This highly robust, low-maintenance two-seater is built to last—from bolt-on bumper to bumper. EE rating available.




Other Models : 48V Narrow

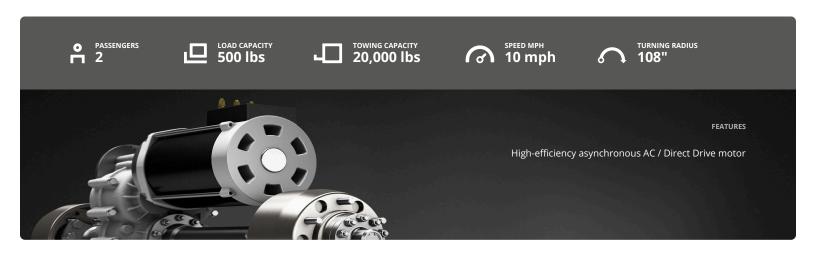







Dimensions

VEHICLE		
Height	45"	1,143 mm
Length	95"	2,413 mm
Width	45"	1,143 mm
Wheel Base	44"	1,118 mm
Ground Clearance	n/a	n/a
DECK		
Height	28"	711 mm
Width	46"	1,168 mm
Length	19"	483 mm
UNIT WEIGHT		
With Batteries	n/a	n/a
Without Batteries	1,750 lbs	794 kg
BATTERIES		
BATTERIES Height	24"	610 mm
	24" 21"	610 mm 533 mm
Height	= ''	
Height Length	21"	533 mm
Height Length Width	21" 43"	533 mm 1,092 mm

Performances

٦	ı	r	ŧ.	i	i	-	i
٦	/				ı	L	

Passengers	2	
Load Capacity	500 lbs	227 kg
Tow Capacity	20,000 lbs	9,072 kg
Drawbar Pull - Normal	400 lbs	1,779 N
Drawbar Pull - Ultimate	1,300 lbs	5,783 N
Speed MPH	10 mph	16 km/h
Turning Radius	108"	2,743 mm

 $\label{thm:continuous} \textit{Vehicle shown may have optional accessories and is provided for illustrative purposes only.}$

Specifications and standard equipment are subject to change without notice.

Specifications

Motor	15 hp Fan cooled AC motor
Controller	AC Electronic speed controller
Drive Axle	Helical gear differential
Brakes	Four-wheel hydraulic brakes, regenerative braking
Wheels	500x8 solid softy rubber wheels on split rims
Transmission	Direct drive with ground-tooth gears
Suspension	Front leaf spring suspension with dual shock absorbers, rear leaf spring suspension
Starter	n/a
Clutch	n/a
Engine	n/a
ENERGY	
Voltage	48 Volt
Battery	No battery included
Charger	No charger included
Alternator	n/a
Fuel	n/a
CHASSIS	

OPERATOR COMPARTMENT

Body

Color

Lights

Steering	Automotive steering wheel
Seats	Two bucket seats on slide adjusters
Indicators	Multifunction display including speedometer,
	battery state of charge, hour meter, odometer
	and fault warnings. Password-protected
	parameters and monitoring capability.
Safety	Reverse alarm, deadman seat switch, horn
Accessories	48V/12V converter for 12-volt accessories

All-steel unibody construction

Security orange or federal yellow

LED dual headlights & tail/brake lights

Standards

Conforms to requirements for type E, UL 583, ANSI B56.9





GET THE IDEAL VEHICLE FOR THE JOB.



With unlimited configurations, we make customization quick, easy and affordable.

Equipments

330-055F ABC fire extinguisher

Hitches

448-056 Clevis type hitch (1") with safety spring

448-052C Hand release for clevis hitch (requires clevis hitch)

Safety Features

360-023 Motion beeper

360-026-AC Pole mounted strobe light

Seats

360-049 Seat belts, retractable, two passengers

Steering Systems

448-100 Tilt-telescopic steering column with horn on steering wheel

The list above shows the most popular options for this vehicle. More options are available. To learn more about the MT - 440 - 48V options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.

n/a



n/a	n/a
n/a	n/a
n/a	n/a
n/a	n/a n/a
n/a	n/a